




2025 Demo Frame 1 | Geometry

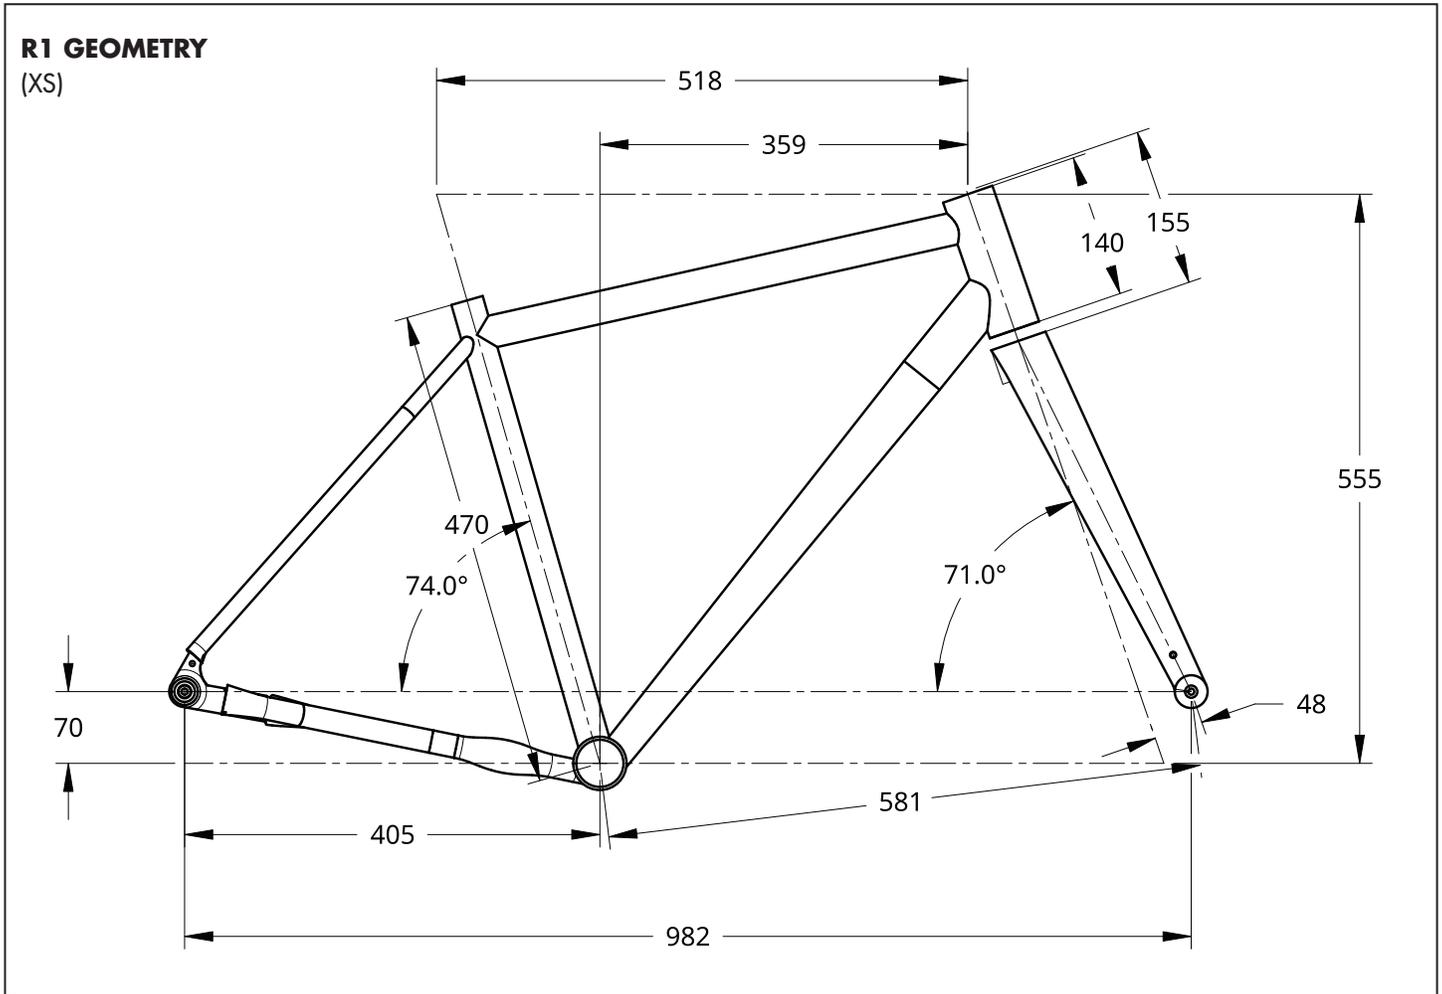


2024 Demo Frame 2 | Geometry

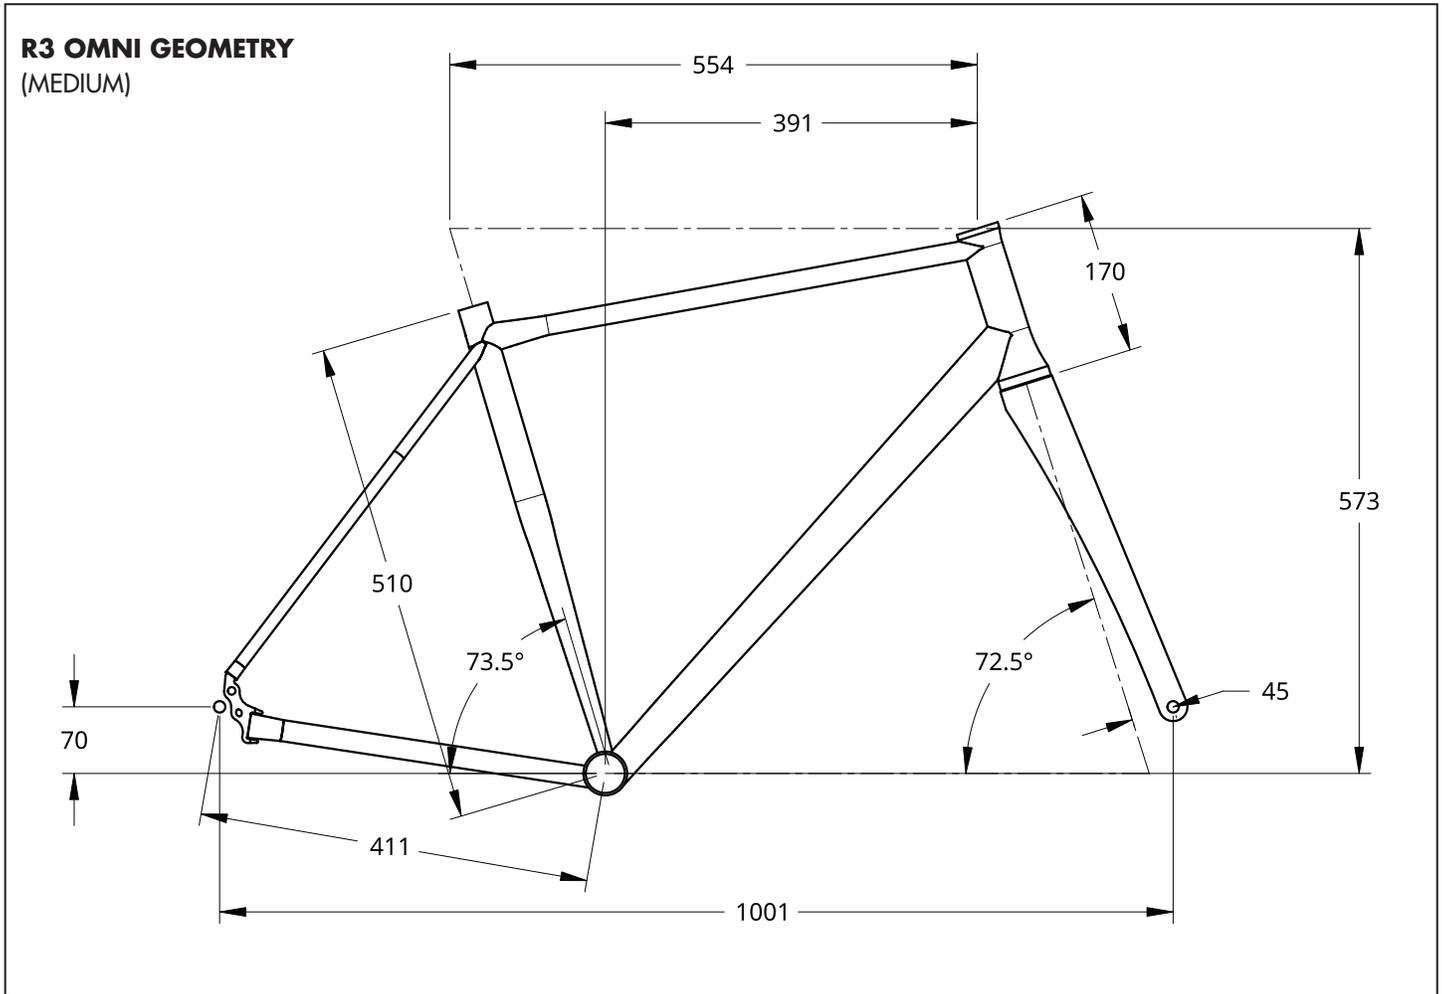


2024 Demo Frame 3 | Geometry

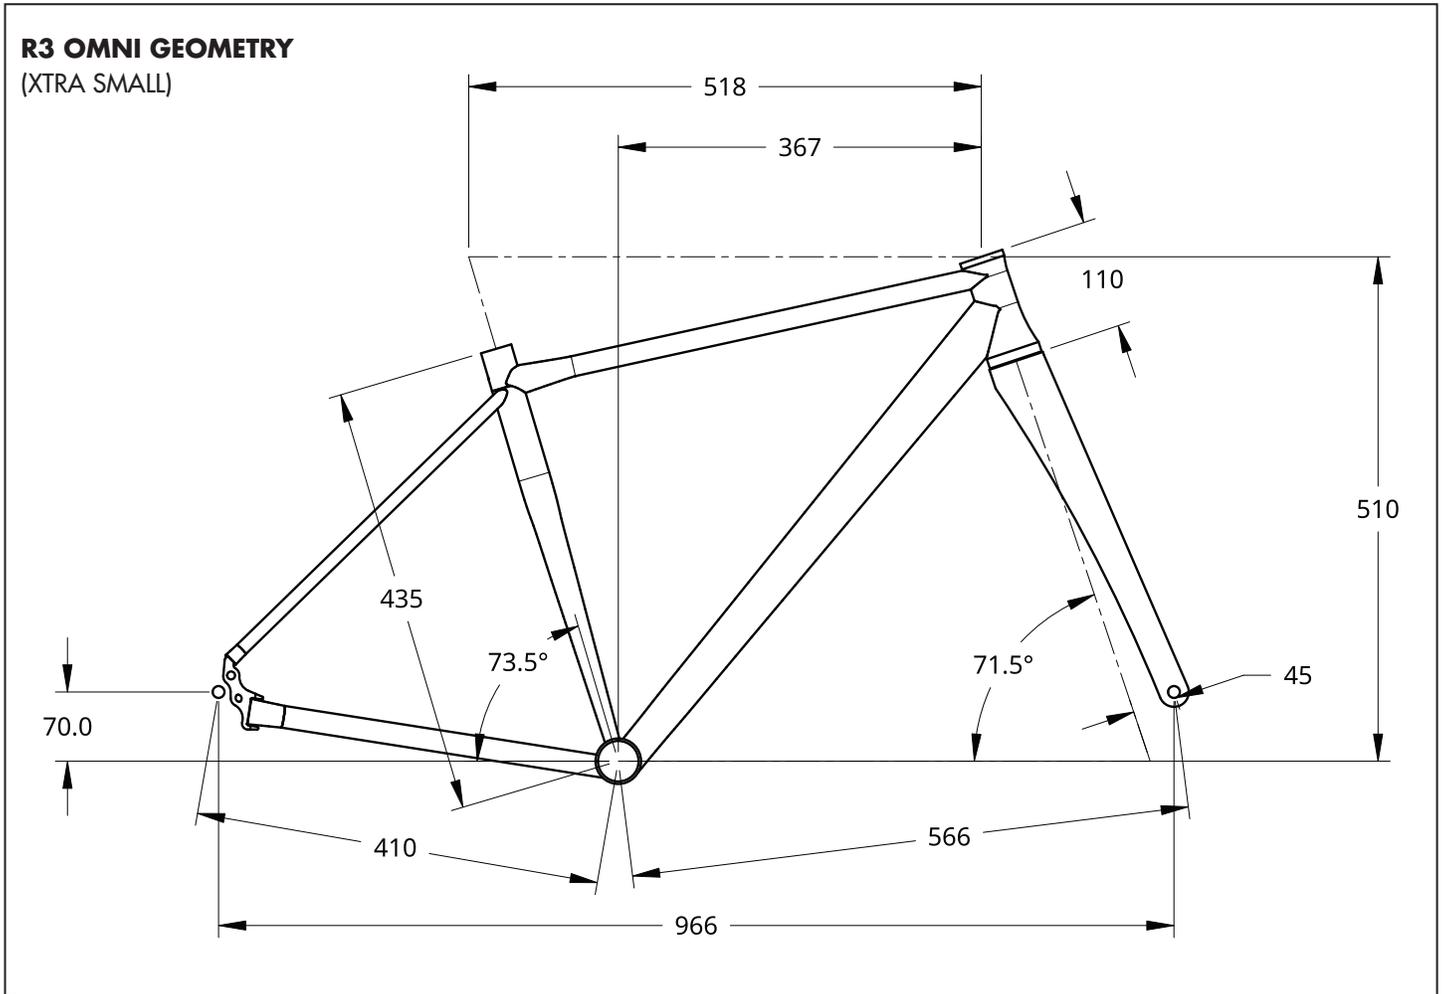


2024 Demo Frame 6 | Geometry

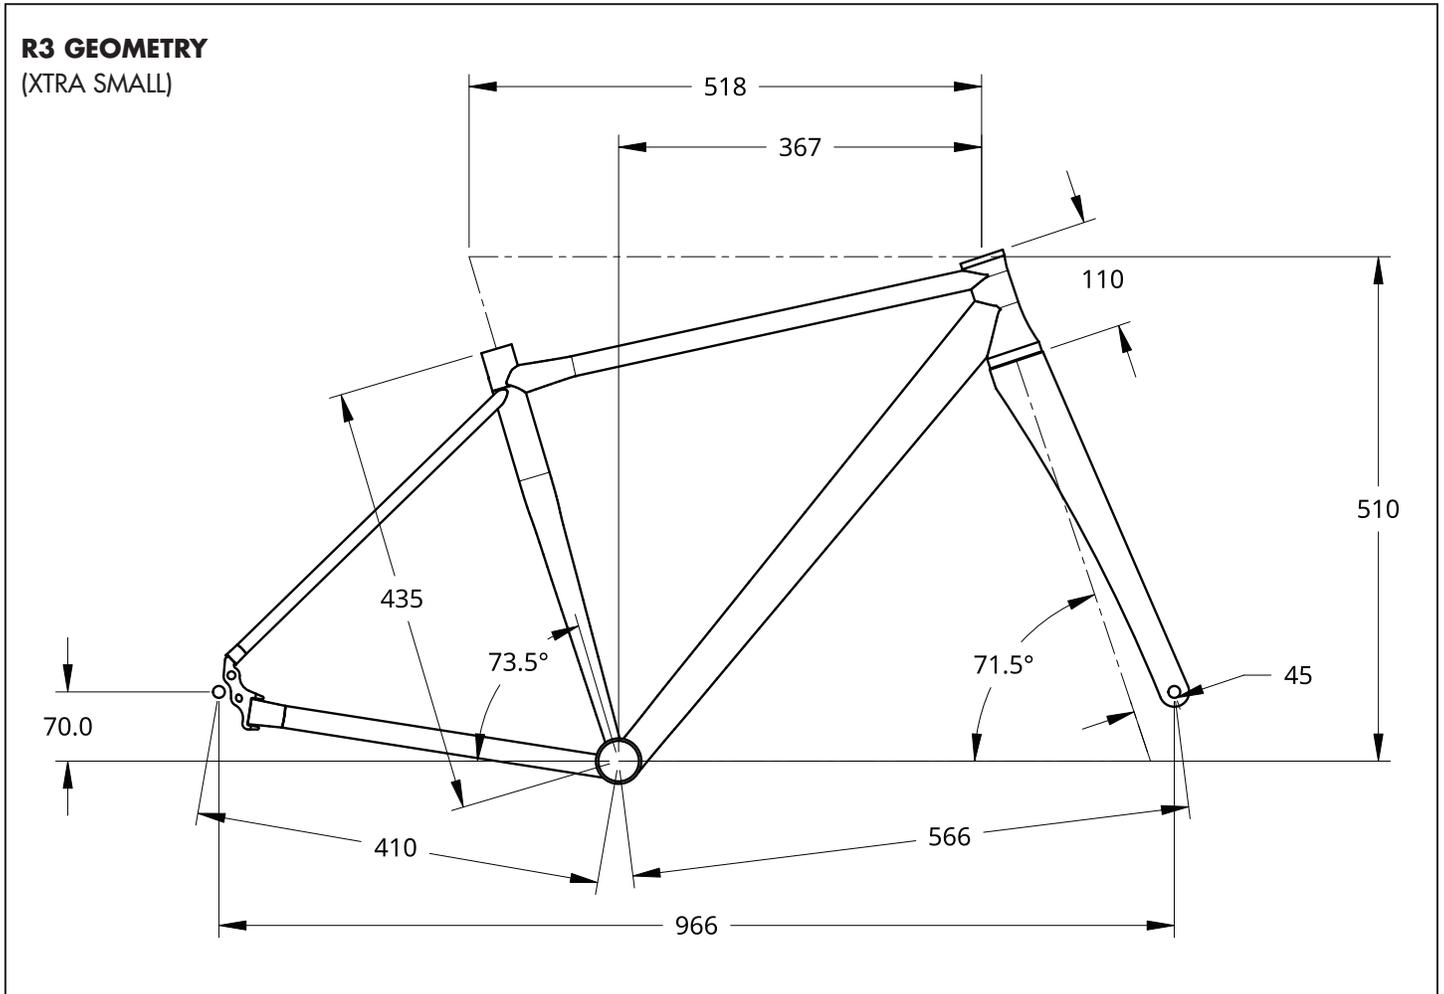


2025 Demo Frame 9 | Geometry

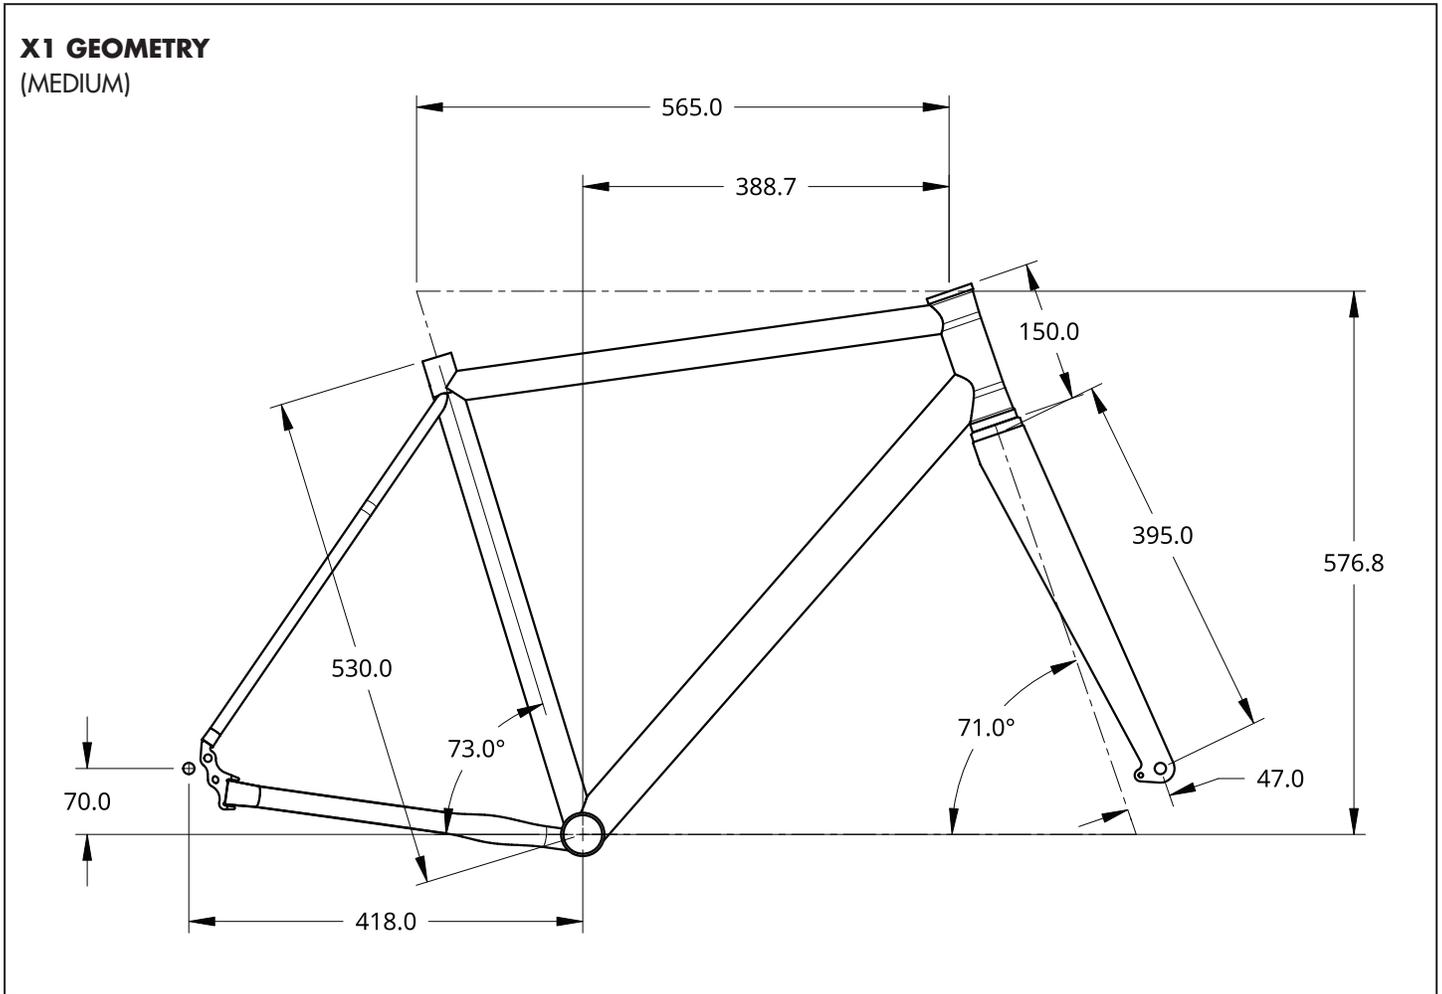


2024 Demo Frame 11 | Geometry

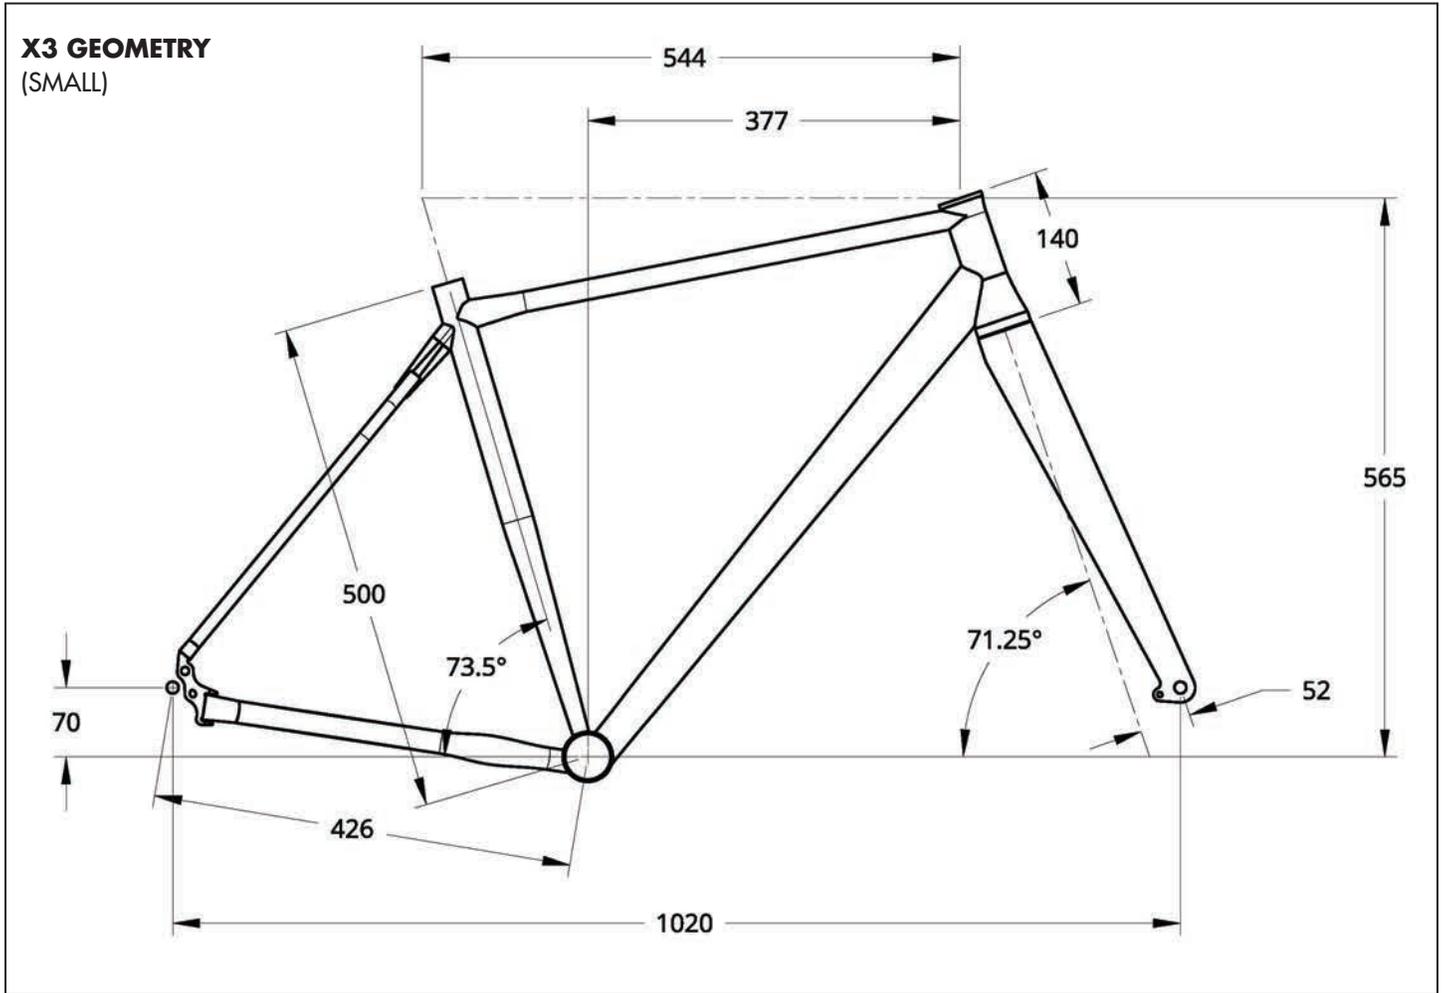


2025 Demo Frame 12 | Geometry

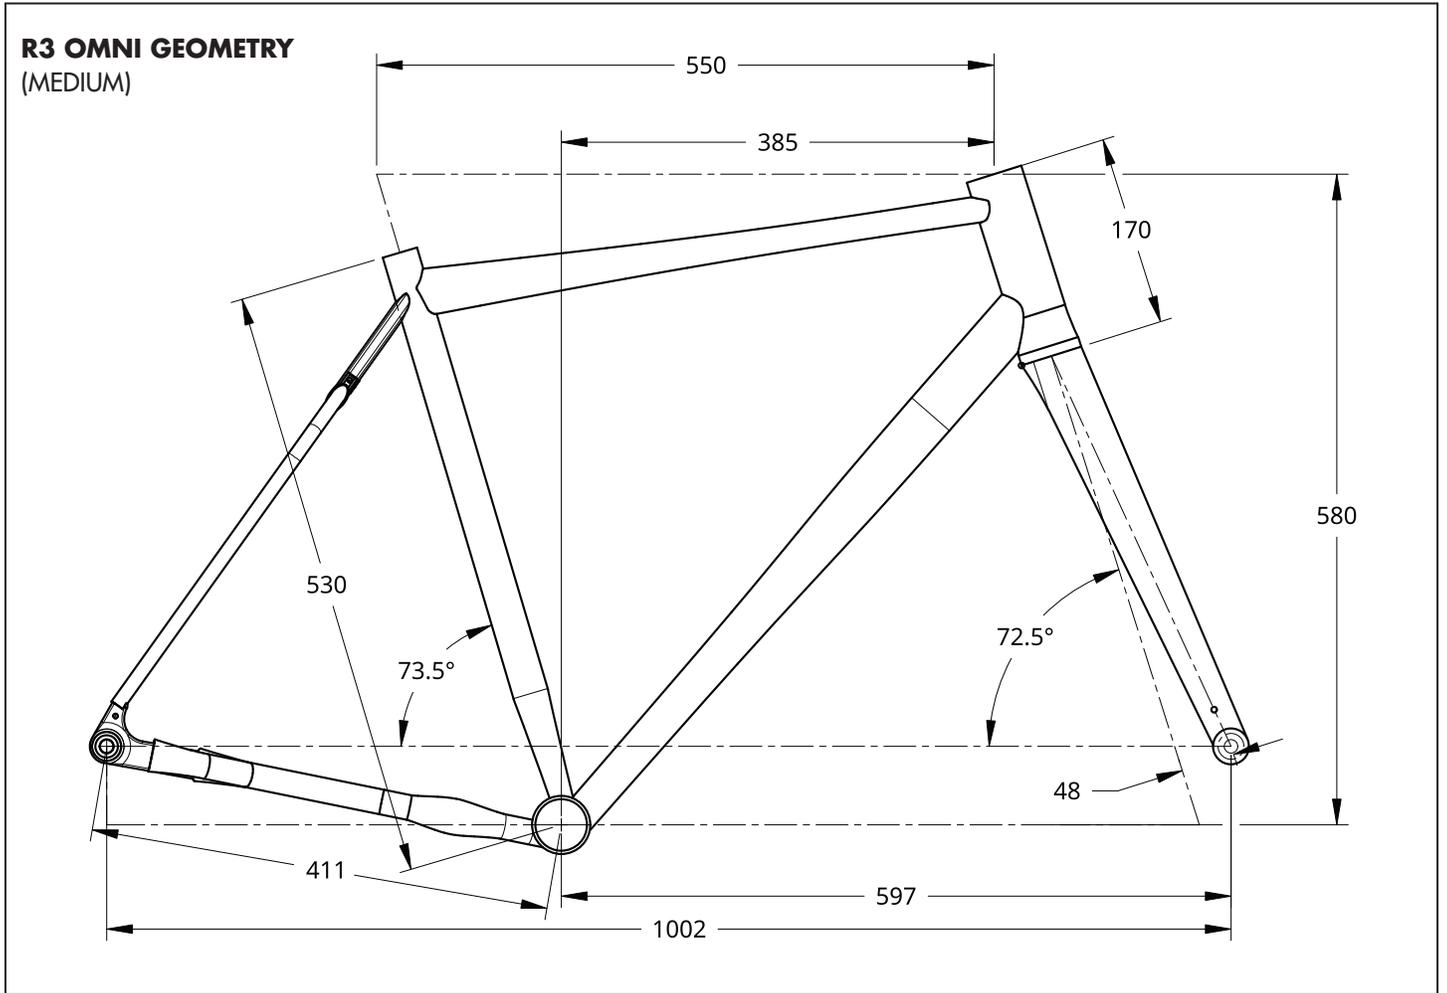


2025 Demo Frame 13 | Geometry

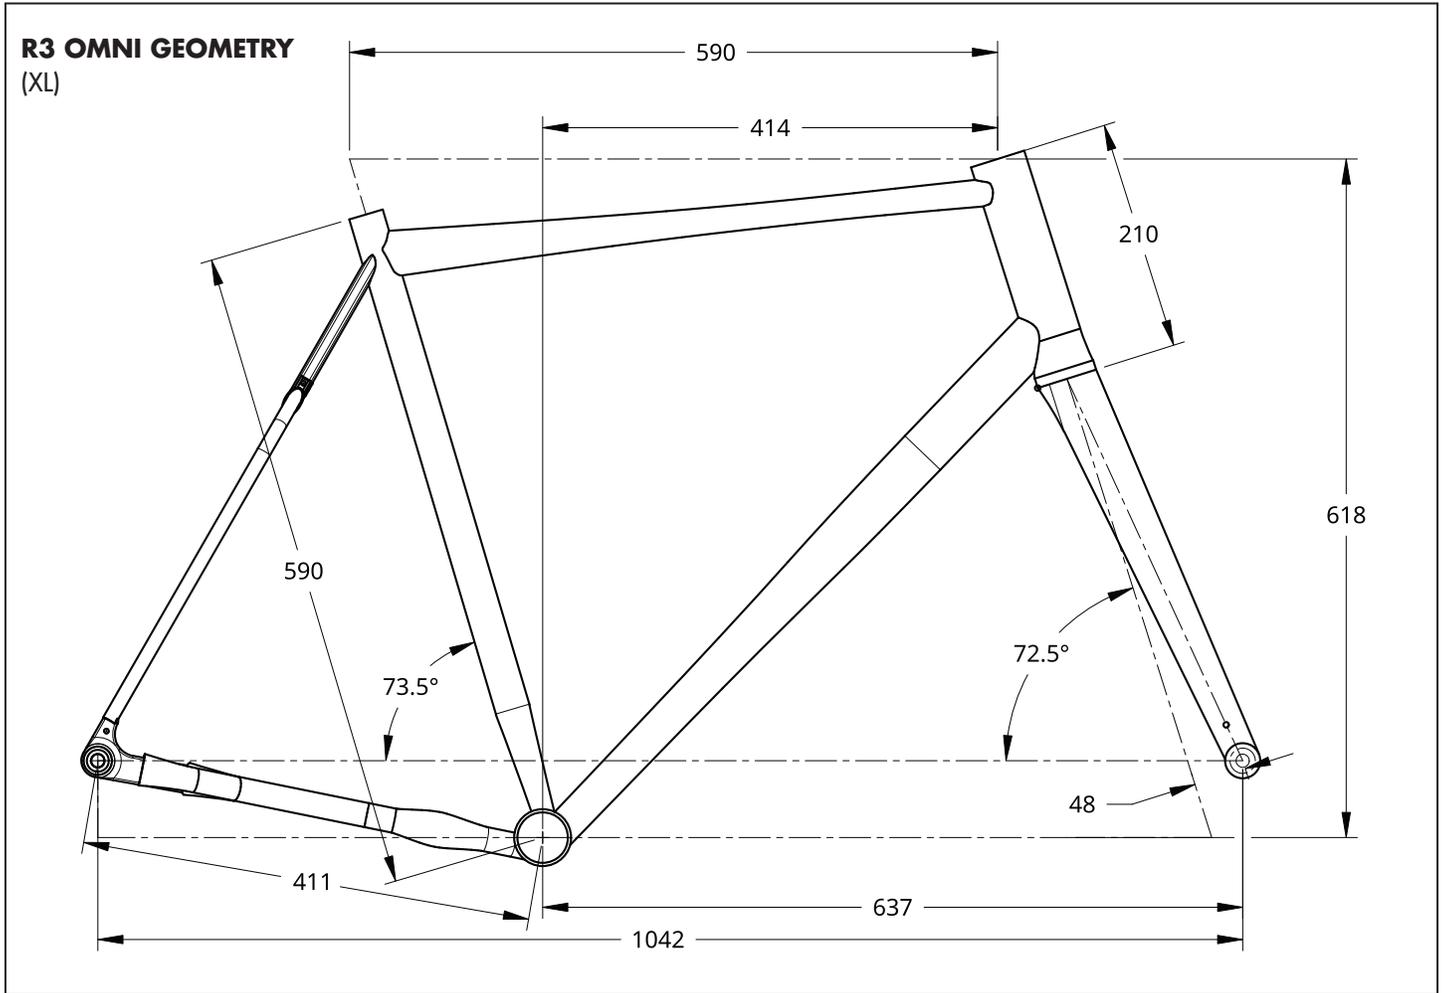

2025 Demo Frame 14 | Geometry

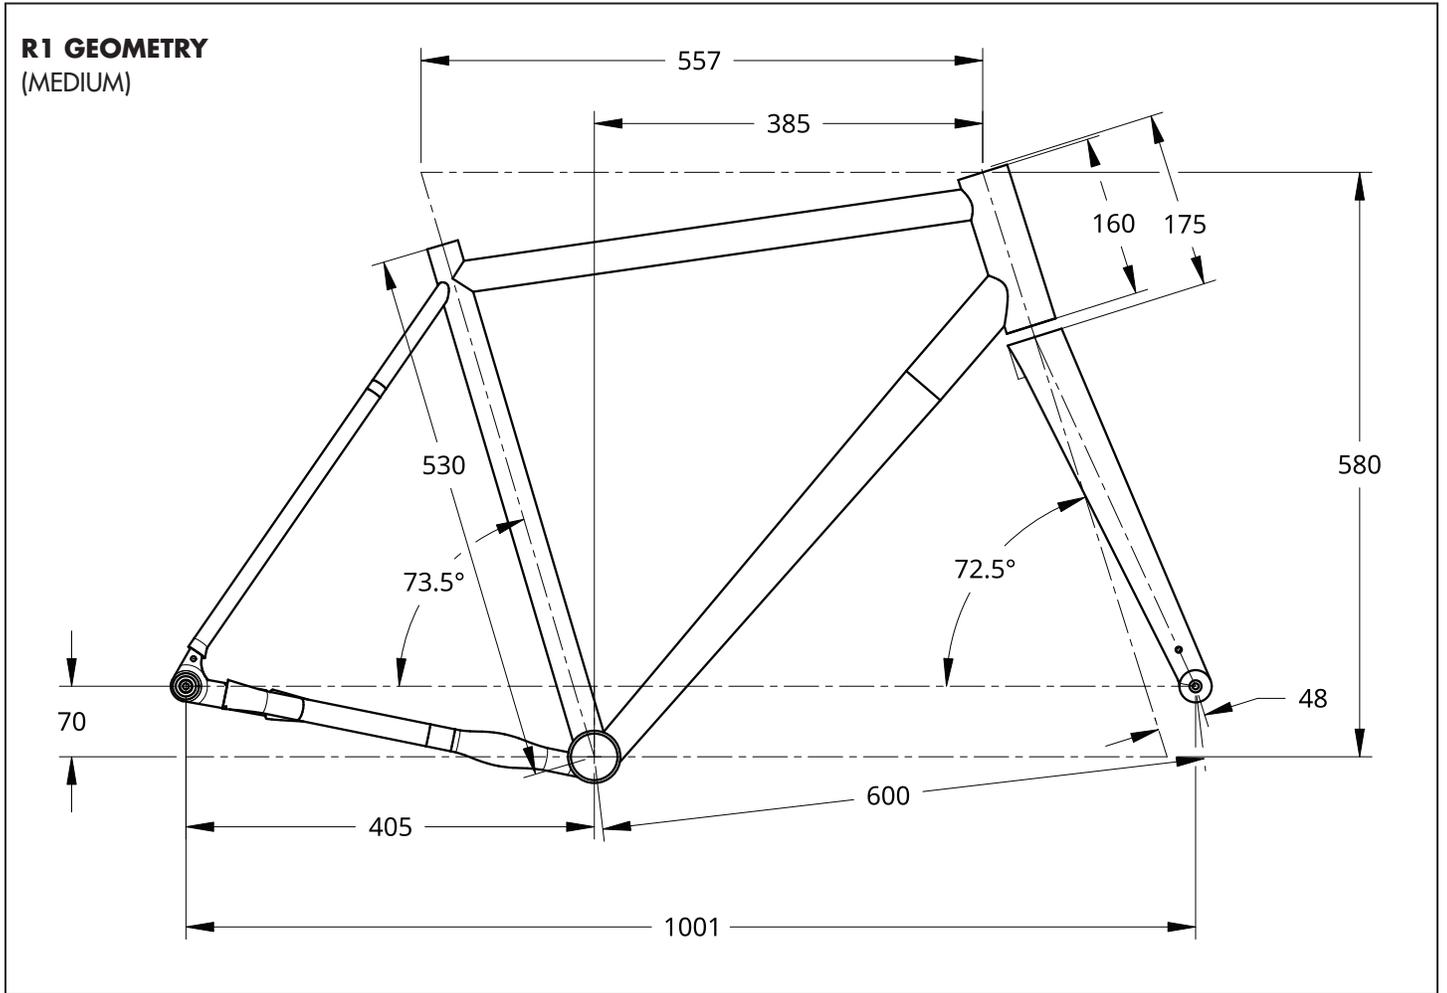

2024 Demo Frame 15 | Geometry

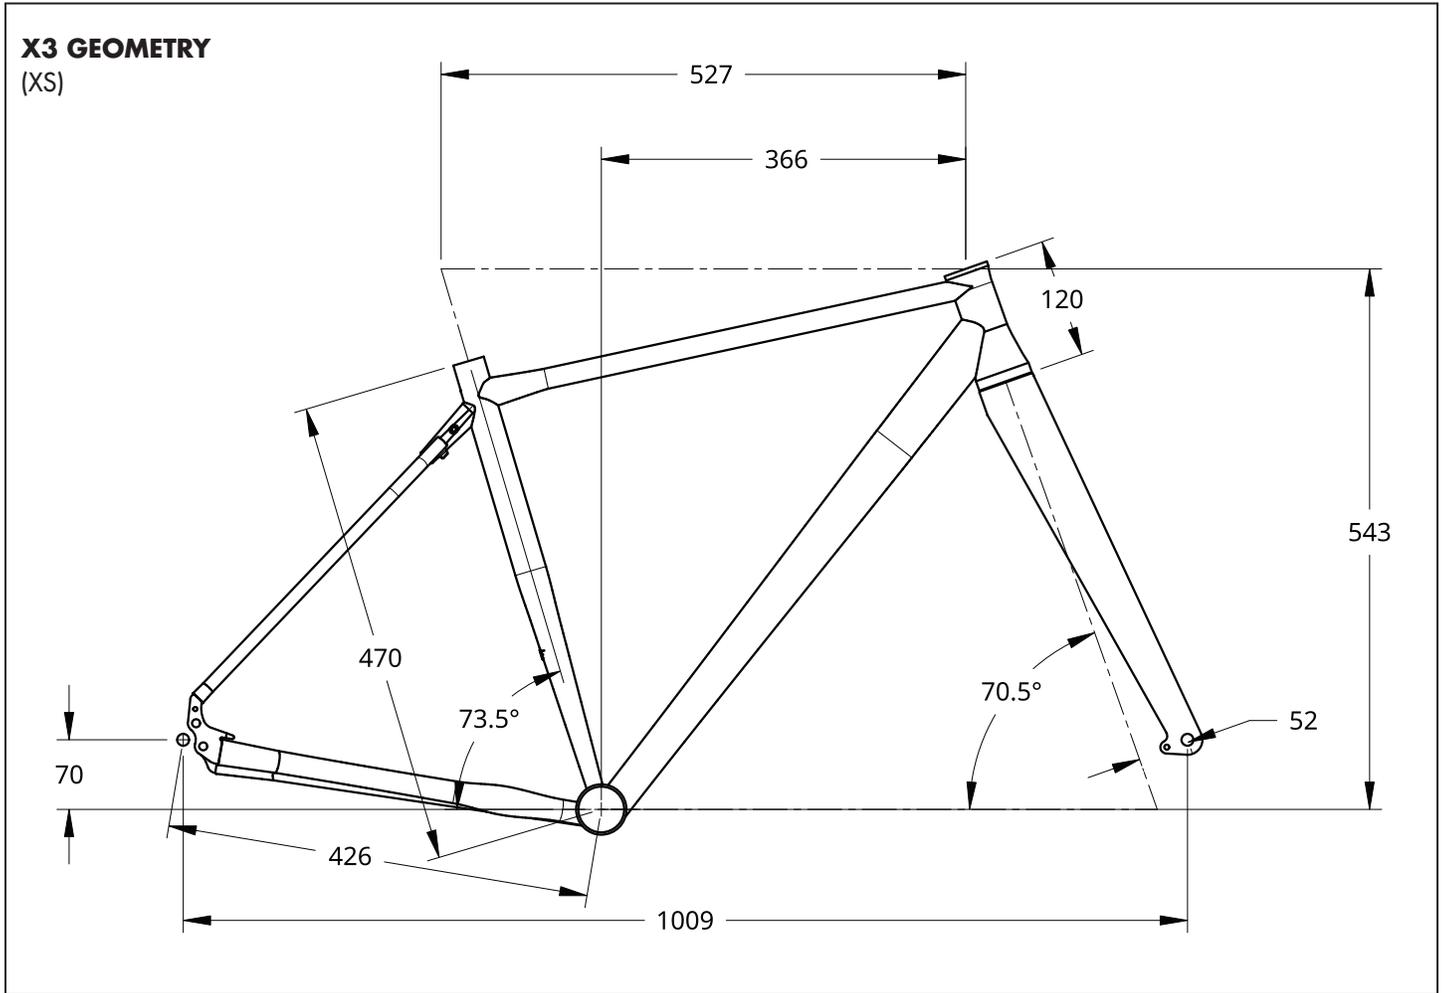

2025 Demo Frame 16 | Geometry

Frame Size	Unit	XXS	XS	S	M	L	XL
Average Cyclist Height	(equiv.) ft-in	(50): 5' to 5'-4"	(52): 5'-4" to 5'-6"	(54): 5'-6" to 5'-8"	(56): 5'-10" to 6'-0"	(58): 6'-2" to 6'-4"	(60): 6'-4" to 6'-6"
Standover Height	mm	721	739	765	793	819	836
Seat Tube Angle	deg	74	73.5	73.5	73.5	73.5	73.5
Seat Tube Length (center-to-top)	mm	450	470	500	530	560	580
Top Tube Length (horizontal)	mm	505	519	536	554	578	598
Head Tube Angle	deg	70.5 (toe overlap 4cm more than M)	71	71.25	71.5	71.5	71.5
Head Tube Length*	mm	100	120	140	160	180	200
Frame Stack	mm	524	545	565	585	604	623
Frame Reach	mm	356	366	377	389	407	422
Bottom Bracket Drop	mm	76	76	76	76	76	76
Fork Rake	mm	50	50	50	50	50	50
Front Center Distance	mm	573	586	601	617	641	662
Trail	mm	74	71	67	67	67	67
Chain Stay Length	mm	428	428	428	428	428	428
Wheelbase	mm	996	1009	1024	1040	1065	1085